


Data Sheet | Item Number: 2273-500

Suport de montaj; pentru con. cu una și două linii; Seria 2273; pt mont. pe șină DIN 35/montare cu șurub; portocaliu

<https://www.wago.com/2273-500>

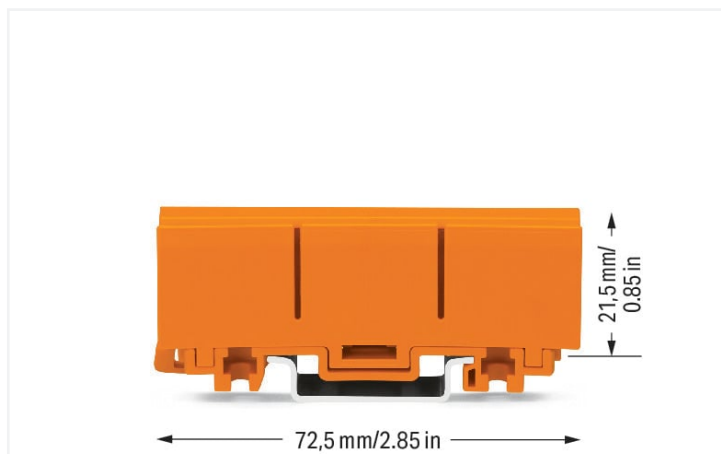

Color: ■ portocaliu



Notes

Note

One single carrier can hold up to 24 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks.
Additional benefits:

- Mount carrier onto DIN-35 rail or via screws – easily and quickly
- Accommodate three 2.5 mm² (12 AWG) 2273 Series Connectors in a single carrier
- Easily exchange connectors
- Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

Physical data

Width	18,5 mm / 0.728 inci
-------	----------------------

Mechanical Data

Mounting type	DIN-35 rail Screw mount
Suitable	for single- and double-row connectors (2273 Series)

Material Data

Note (material data)	Information on material specifications can be found here
Color	portocaliu
Fire load	0.31 MJ
Weight	10.7 g



Commercial data	
Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) Buc.
Packaging type	Box
Country of origin	DE
GTIN	4050821101871
Customs tariff number	39269097900

Approvals / Certificates		
Approvals for marine applications		
		
Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Germanischer Lloyd	EN 60998	TAE000015T

Downloads			
Documentation			
Bid Text			
2273-500	19.02.2019	xml 2.58 KB	
2273-500	17.05.2017	doc 23.50 KB	
ausschreiben.de 2273-500			

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 2273-500 	EPLAN Data Portal 2273-500 
	WSCAD Universe 2273-500 
	ZUKEN Portal 2273-500 




1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-834
Benzii de marcat; pe bobină; Lăţime de 5 mm; simplu; Auto-adeziv; alb

Installation Notes



The mounting carrier is suitable for both connector heights.

To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.



The mounting carrier is suitable for both connector widths and can be adjusted by unlocking the latch via operating tool (5.5 mm blade) and moving the clamping slide to the required width by rotating the tool.

The mounting carrier is suitable for both connector widths.